

## OVERVIEW



1. USB 3.2 Gen 1	5. USB 3.2 Gen 1
2. Ethernet (RJ-45)	6. HDMI
3. Kensington Nano Security Slot	7. USB-C 3.2 Gen 1
4. Power connector	8. Headphone / microphone combo jack (3.5mm)

## PERFORMANCE

### Processor

#### Processor Family

AMD Athlon™ or AMD Ryzen™ 3 / 5 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD Athlon™ Gold 7220U	2	4	2.4GHz	3.7GHz	1MB L2 / 4MB L3	AMD Radeon™ 610M Graphics
AMD Athlon™ Silver 7120U	2	2	2.4GHz	3.5GHz	1MB L2 / 2MB L3	AMD Radeon™ 610M Graphics
AMD Ryzen™ 3 7320U	4	8	2.4GHz	4.1GHz	2MB L2 / 4MB L3	AMD Radeon™ 610M Graphics
AMD Ryzen™ 5 7520U	4	8	2.8GHz	4.3GHz	2MB L2 / 4MB L3	AMD Radeon™ 610M Graphics

### Operating System

#### Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- No preload operating system

### Graphics

#### Graphics

Graphics	Type	Memory	TGP	Key Features
AMD Radeon™ 610M	Integrated	Shared	Share CPU TDP	DirectX® 12

### Monitor Support

#### Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI® and USB-C®)

- HDMI® supports up to 3840x2160@30Hz
- USB-C® supports up to 4096x2160@60Hz

### Chipset

#### Chipset

AMD SoC (System on Chip) platform

### Memory

#### Max Memory

- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable

#### Memory Slots

Memory soldered to systemboard, no slots, dual-channel

#### Memory Type

LPDDR5-5500

### Storage

#### Storage Support<sup>[1]</sup>

One drive, up to 512GB M.2 2242 SSD

#### Storage Slot

One M.2 2242 PCIe® 3.0 x2 slot

#### Storage Type\*\*

Disk Type	Interface	Offering
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x4 <sup>[2]</sup>	128GB
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4 <sup>[3]</sup>	256GB / 512GB

## Notes:

- [1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.  
 [2] The SSD with PCIe® 3.0x4 is downgraded to closer to PCIe® 3.0x2 due to the system slot limitation.  
 [3] The SSD with PCIe® 4.0x4 is downgraded to closer to PCIe® 3.0x2 due to the system slot limitation.

## Removable Storage

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

### Speakers

Stereo speakers, 1.5W x2, Dolby Audio™

### Microphone

Dual-microphone array

### Camera

HD 720p, with privacy shutter, fixed focus

## Battery

### Battery\*\*

- Integrated Li-Polymer 38Wh battery, supports Rapid Charge (charge up to 80% in 1hr)
- Integrated Li-Polymer 47Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

### Max Battery Life<sup>[1]</sup>

- Models with 38Wh battery:
  - MobileMark® 2018: 8.7 hr
  - Local video (1080p) playback@150nits: 14.4 hr
- Models with 47Wh battery:
  - MobileMark® 2018: 11.6 hr
  - Local video (1080p) playback@150nits: 15.1 hr

## Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, JEITA 2.0, JEITA 3.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

## Power Adapter

### Power Adapter\*\*<sup>[1]</sup>

- 65W round tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz<sup>[2]</sup>

## Notes:

- [1] AC adapter offerings depend on the country.  
 [2] Only MT 83CQ configured with 65W USB-C® AC adapter is TCO certified.

## DESIGN

## Display

### Display\*\*

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
15.6"	FHD (1920x1080)	None	TN	250nits	Anti-glare	16:9	500:1	45% NTSC	60Hz	45° / 45° / 15° / 35°	TÜV Low Blue Light (Software)
15.6"	FHD (1920x1080)	None	IPS <sup>[1]</sup>	300nits	Anti-glare	16:9	800:1	45% NTSC	60Hz	85° / 85° / 85° / 85°	TÜV Low Blue Light (Software)

### Touchscreen

Non-touch

Notes:

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

## Input Device

### Keyboard

6-row, spill-resistant, multimedia Fn keys, SMB Service Hot key, numeric keypad

### Keyboard Backlight

Non-backlight

### Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 62 x 104 mm (2.44 x 4.09 inches)

## Mechanical

### Dimensions (WxDxH)<sup>[1]</sup>

359.2 x 235.8 x 19.9 mm (14.14 x 9.28 x 0.78 inches)

### Weight<sup>[2]</sup>

Less than 1.63 kg (3.59 lbs)

### Case Color\*\*

- Arctic grey
- Business black

### Surface Treatment\*\*

- IMR (in-mold decoration by roller)
- Texture

### Case Material

PC-ABS (top), PC-ABS (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

#### Ethernet

Gigabit Ethernet, 1x RJ-45

#### WLAN + Bluetooth®\*\*

- Wi-Fi® 5, 802.11ac 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 Card
- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 card<sup>[1]</sup>

Notes:

[1] Wi-Fi® 6 full features might be limited by country-level restrictions.

## Ports<sup>[1]</sup>

### Standard Ports

- 2x USB 3.2 Gen 1
- 1x USB-C® 3.2 Gen 1 (support data transfer, Power Delivery (20V only) and DisplayPort™ 1.2)
- 1x HDMI® 1.4b
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)
- 1x Power connector

### Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

## Docking

### Docking

Various docking solutions supported via USB-C®.

For more compatible docking solutions, please visit [Docking for Lenovo® V15 G4 AMN](#)

## SECURITY & PRIVACY

### Security

#### Security Chip

Firmware TPM 2.0 integrated in SoC

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

#### Fingerprint Reader

No fingerprint reader

#### BIOS Security

- Supervisor password
- Power-on password
- Hard disk password

#### Other Security

Camera privacy shutter

## SERVICE

### Warranty

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 2-year (1-yr battery) courier or carry-in service
- No base warranty

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories<sup>[1]</sup>

None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for Lenovo® V15 G4 AMN](#).

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature<sup>[1]</sup>

- At altitudes up to 2438 m (8,000 ft)
  - Operating: 5°C to 35°C (41°F to 95°F)
  - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
  - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

#### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2][3]</sup>

- (Optional) TCO Certified 9.0
- ENERGY STAR® 8.0
- EPEAT™ Silver Registered<sup>[4]</sup>
- ErP Lot 3
- FSC certified package
- RoHS compliant

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit [epeat.net](https://epeat.net) and [energystar.gov](https://energystar.gov) for more information.

[3] TCO Certified 9.0 is only available for MT 83CQ (excluding India and Brazil).

[4] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

TÜV Rheinland® Low Blue Light (Software Solution)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain

transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD




AMD



AMD



AMD

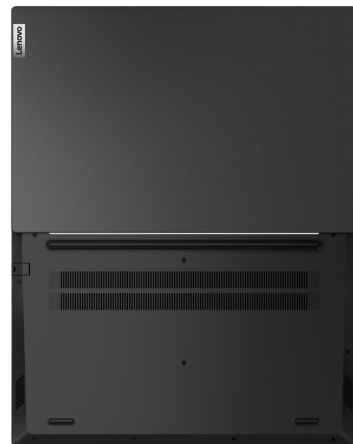

AMD